

T9 Circline Plus

FC40/830
0001966



Product features

- T9 Circline Plus



PRODUCT OVERVIEW

Product name	FC40/830
Technology	Fluorescent
Watt (Rated) (W)	40
Lamp shape	Ring
Type	T9 Circline Plus
Cap/Base	G10q
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940728
E-number Norway	3845366
Luminous flux (lm)	2900
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	40
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	12000
Product EAN number	5410288019666

DATA TABLE

General data

Product name	FC40/830
Technology	Fluorescent
Watt (Rated) (W)	40
Lamp shape	Ring
Type	T9 Circline Plus

T9 Circline Plus

FC40/830

0001966

Cap/Base	G10q
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940728
E-number Norway	3845366

Optical data

Luminous flux (lm)	2900
Luminous flux (Rated) (lm)	2900
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h 50Hz	78
Rated lumen maint. factor (%) at 6000 h 50Hz	77
Rated lumen maint. factor (%) at 8000 h 50Hz	76
Rated lumen maint. factor (%) at 12000 h 50Hz	74

Electrical data

Wattage (W)	40
Current (A)	0.415
Control gear required	Yes
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	44

Lifetime data

Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	99
Rated survival factor (%) at 4000 h 50Hz	97
Rated survival factor (%) at 6000 h 50Hz	92
Rated survival factor (%) at 8000 h 50Hz	85
Rated survival factor (%) at 12000 h 50Hz	50

Physical data

Nominal Product Height (mm)	29
-----------------------------	----

T9 Circline Plus

FC40/830

0001966

Nominal Product Diameter (mm)	400
Max. Length base to base (mm) - A	400
Length base to pin Min-Max (mm) - B	400
Max. Lamp Diameter (mm) - D	29
Weight (kg)	0.234


Packaging

Single packaging type	Carton
Product EAN number	5410288019666
Packaging single length / height (cm)	40.7
Packaging single width (cm)	3.6
Packaging single depth (cm)	40.8
DUN14 (outer)	15410288019663
Units per outer package	12
Packaging outer length / height (cm)	42.3
Packaging outer width (cm)	41.8
Packaging outer depth (cm)	43.1


Safety data

Lamp mercury content (mg)	3.5
Breakage cleaning instructions	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

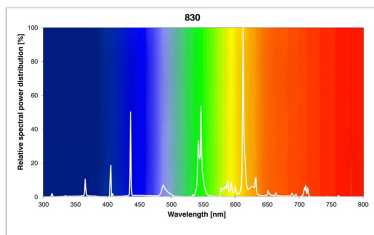

TECHNICAL DRAWINGS

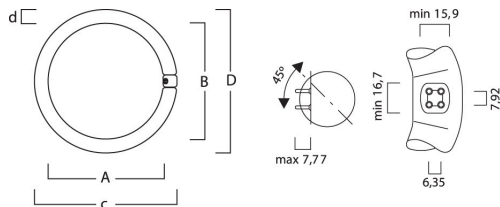

T9 Circline Plus
FC40/830
0001966



40
kWh/1000h




2019/2015

T9 Circline Plus
FC40/830
0001966



0001966

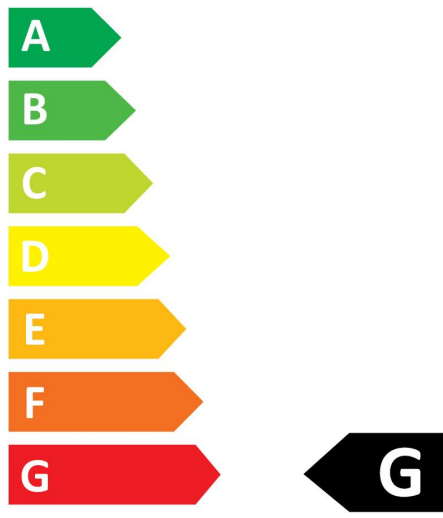

40
kWh/1000h



2019/2015