


Gro-Lux® HPS GRO-LUX SHP-TS 250W E40 SLV 0020819



Product features

- Gro-Lux High Pressure Sodium 250W grow lamp | Patented arc tube delivers the highest photosynthetic efficiency | Performance maintained at an exceptional level due to improved structure of the outer bulb, - Optimised for the highest Phytolumens or PAR output | Industry leading lumen maintenance of 95% at the end of life | For use as complete or additional artificial lighting of plants | Recommended for use in greenhouses and indoor lighting.



PRODUCT OVERVIEW

Product name	GRO-LUX SHP-TS 250W E40 SLV
Technology	HID
Lamp shape	Tubular shape
Type	SHP-TS
Cap/Base	E40
Lamp finish	Clear
Fixture rating	Open

Gro-Lux® HPS

GRO-LUX SHP-TS 250W E40 SLV
0020819

General application	SPG
ETIM Class	EC000821
E-number FI	4844460
Luminous flux (lm)	34000
Colour temperature (K)	2050
Light colour	Grolux
CRI (Ra)	20
Wattage (W)	265
Product Voltage (V)	115
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	26000
Product EAN number	5410288208190

DATA TABLE

General data

Product name	GRO-LUX SHP-TS 250W E40 SLV
Technology	HID
Lamp shape	Tubular shape
Type	SHP-TS
Cap/Base	E40
Lamp finish	Clear
Fixture rating	Open
General application	SPG
ETIM Class	EC000821
E-number FI	4844460

Optical data

Luminous flux (lm)	34000
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2050
Light colour	Grolux
CRI (Ra)	20
Adjustable chromaticity	N
Rated lumen maint. factor (%) at 4000 h 50Hz	96
Rated lumen maint. factor (%) at 6000 h 50Hz	94
Rated lumen maint. factor (%) at 8000 h 50Hz	93
Rated lumen maint. factor (%) at 12000 h 50Hz	91
Rated lumen maint. factor (%) at 16000 h 50Hz	90
Rated lumen maint. factor (%) at 20000 h 50Hz	89

Gro-Lux® HPS

GRO-LUX SHP-TS 250W E40 SLV
0020819

Electrical data

Wattage (W)	265
Current (A)	2.6
Product Voltage (V)	115
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
kWh per 1000 hours burning time	292

Lifetime data

Average life (Nominal) (h)	26000
Average life (Rated) (h)	26000
Life T90	16000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	99
Rated survival factor (%) at 6000 h 50Hz	98
Rated survival factor (%) at 8000 h 50Hz	97
Rated survival factor (%) at 12000 h 50Hz	90
Rated survival factor (%) at 16000 h 50Hz	79
Rated survival factor (%) at 20000 h 50Hz	66

Physical data

Length base to pin Min-Max (mm) - B	1153.7-1156.1
Max. Lamp Diameter (mm) - D	48
Weight (kg)	0.178

Packaging


Single packaging type	Carton
Product EAN number	5410288208190
Packaging single length / height (cm)	30.5
Packaging single width (cm)	5.0
Packaging single depth (cm)	5.0
DUN14 (outer)	15410288208197
Units per outer package	12
Packaging outer length / height (cm)	28.0
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	33.0

Safety data

Lamp mercury content (mg)	22.70
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Intended purpose	Horticulture
Suitable for household illumination	No


Gro-Lux® HPS GRO-LUX SHP-TS 250W E40 SLV 0020819

PHOTOMETRY

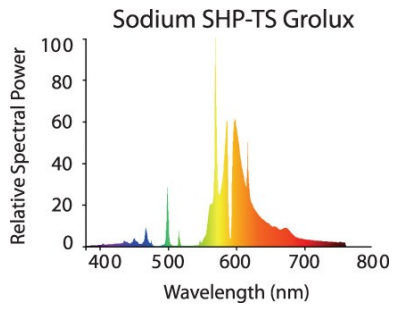

TECHNICAL DRAWINGS

SHP-TS GROLUX



SHP-TS GroLux	250W	400W	600W
L	260	292	292
D	48	48	48