

Your benefits


- Ideal for insect traps and other UVA applications
- Emits effective long wave UVA light
- Different form factors enables freedom of design
- RoHS compliant and lead free
- Lowest Hg content

Light is protecting OSRAM BLUE UVA / Color 78

The multi-purpose UVA low-pressure lamps for technical and biological applications

Light is OSRAM

OSRAM

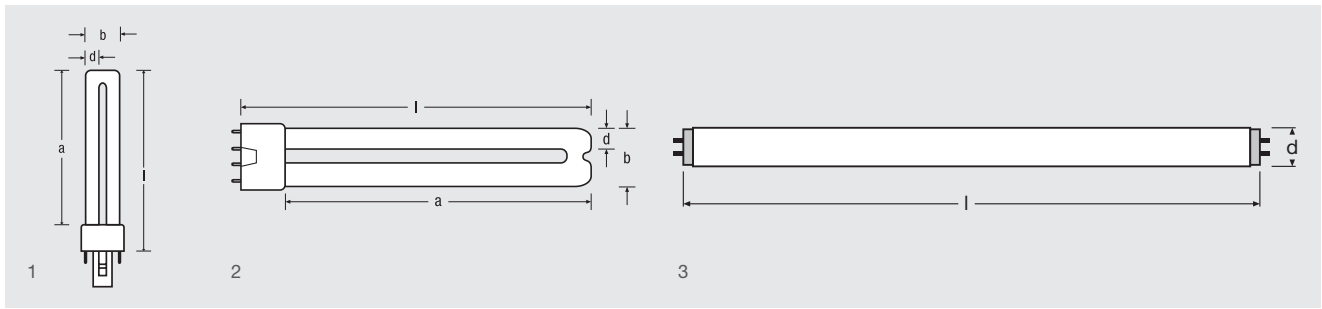

DULUX® S BLUE UVA



DULUX® L BLUE UVA



LINEAR BLUE UVA

OSRAM BLUE UVA lamps

Product reference Product number **W** **A** **UVA/W** **l** [mm] **a** [mm] **b** [mm] \varnothing [mm] **t** [h] **No.**

OSRAM DULUX® S BLUE UVA

| | | | | | | | | | | | | |
|----------------------------|---------------|----|------|-----|-----|-----|----|----|-----|--------------------|----|---|
| DULUX® S BL UVA 7W/78 G23 | 4008321198907 | 7 | 0.17 | 1.4 | 114 | 97 | 28 | 12 | G23 | 9000 ¹⁾ | 50 | 1 |
| DULUX® S BL UVA 9W/78 G23 | 4008321198938 | 9 | 0.17 | 1.7 | 144 | 127 | 28 | 12 | G23 | 9000 ¹⁾ | 50 | 1 |
| DULUX® S BL UVA 11W/78 G23 | 4052899037885 | 11 | 0.16 | 2.1 | 211 | 194 | 28 | 12 | G23 | 9000 ¹⁾ | 10 | 1 |

OSRAM DULUX® L BLUE UVA

| | | | | | | | | | | | | |
|-----------------------------|---------------|----|------|------|-----|-----|----|----|------|--------------------|----|---|
| DULUX® L BL UVA 18W/78 2G11 | 4008321198990 | 18 | 0.32 | 3.9 | 225 | 195 | 40 | 18 | 2G11 | 9000 ¹⁾ | 10 | 2 |
| DULUX® L BL UVA 24W/78 2G11 | 4052899037984 | 24 | 0.34 | 5.3 | 315 | 285 | 40 | 18 | 2G11 | 9000 ¹⁾ | 10 | 2 |
| DULUX® L BL UVA 36W/78 2G11 | 4008321875303 | 36 | 0.43 | 7.9 | 411 | 381 | 40 | 18 | 2G11 | 9000 ¹⁾ | 10 | 2 |
| DULUX® L BL UVA 55W/78 2G11 | 4008321894618 | 55 | 0.55 | 12.0 | 530 | 500 | 40 | 18 | 2G11 | 9000 ¹⁾ | 10 | 2 |

OSRAM LINEAR BLUE UVA

| | | | | | | | | | | | | |
|---------------------|---------------|----|------|-----|-----|------|------|----|-----|--------------------|----|---|
| L BL UVA 8W/78 G5 | 4052899077355 | 8 | 0.15 | 1.6 | 288 | N.A. | N.A. | 16 | G5 | 9000 ¹⁾ | 25 | 3 |
| L BL UVA 15W/78 G5 | 4052899077386 | 15 | 0.41 | 3.1 | 288 | N.A. | N.A. | 16 | G5 | 9000 ¹⁾ | 25 | 3 |
| L BL UVA 15W/78 G13 | 4008321880482 | 15 | 0.31 | 4.0 | 438 | N.A. | N.A. | 26 | G13 | 9000 ¹⁾ | 25 | 3 |
| L BL UVA 18W/78 G13 | 4008321880468 | 18 | 0.37 | 4.7 | 590 | N.A. | N.A. | 26 | G13 | 8000 ¹⁾ | 25 | 3 |
| L BL UVA 25W/78 G13 | 4052899263475 | 25 | 0.60 | 6.5 | 437 | N.A. | N.A. | 26 | G13 | 8000 ¹⁾ | 25 | 3 |

1) Average lifetime

OSRAM Blue UVA / Color 78 fluorescent lamps are suitable for a wide range of applications

- Insect traps
- Cosmetic nail curing
- Manufacture of printed circuit boards
- Tempering and curing of photosensitive material
- Fluorescent exciter for scientific and criminological investigations
- Manufacture of dental prosthetics
- Testing of banknotes and credit cards
- Terrarium illumination

OSRAM GmbH

Head office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany
Phone +49 89 6213-0
Fax +49 89 6213-2020
www.osram.com

Professional and Industrial
Applications :

Nonnendammallee 44
13625 Berlin
E-mail: webmaster@osram.com

Partner:



OSRAM