



Clear lamps

They are tubular double-ended infrared halogen lamp used as a high-power and high-efficiency heat source for various industrial applications.

This large range of lamps matches all kinds of industrial patterns thanks to numerous available connections and lengths. They

are compact, clean and outstandingly energy-efficient.

Our clear DR. FISCHER infrared halogen lamps are the technology of choice for a wide range of applications like heating, drying, curing, cooking and many more.

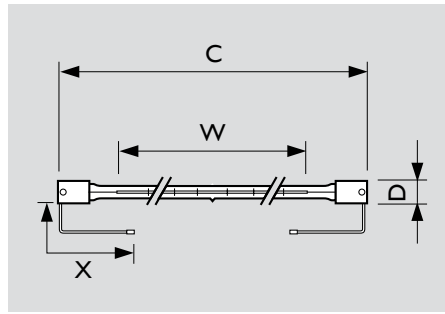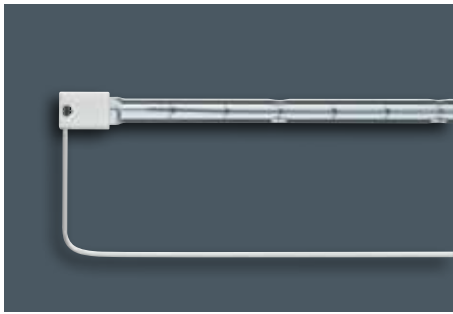

DR. FISCHER Clear lamps
short waves

Type #	Watt	Volt	Total length mm (C)	Heating length mm (W)	Base	Bulb diameter mm (D)	Co-lour temp. K	Burning position	Average life (hrs)	Cable (X)	Terminal	Qty box (pc)	Order #	Ap-plica-tions
13912R	200	230	189.1	120.0	R7s	11.0	2,300	Horiz.	5,000	NA	NA	10	924530344216	All
13908R	300	230	117.5	64.0	R7s	11.0	2,500	Horiz.	1,000	NA	NA	10	923850343301	
13908Z	300	230	122.0	60.0	SK15	11.0	2,500	Horiz.	1,000	140/140	splice	10	924527144216	
13908R	300	230	117.5	64.0	R7s	11.0	2,500	Any	5,000	NA	NA	10	924591444201	
13908Z	300	230	122.0	64.0	SK15	11.0	2,400	Any	5,000	140/140	splice	10	924592244216	All
13908X	300	230	134.0	61.0	X-CLIP	NA	2,500	Horiz.	1,000	NA	NA	10	924593344216	All
13939F-V	400	110	148.0	NA	SK11	11.0	2,150	Horiz.	5,000	105/105	faston	25	924513731926	
13939F-V	400	230	148.0	NA	SK11	10.0	2,250	Horiz.	5,000	105/105	faston	25	924513744226	
13169X	500	120	242.0	142.0	X-CLIP	11.0	2,450	Horiz.	5,000	NA	NA	10	923850032316	All
13169R	500	235	220.6	165.0	R7s	11.0	2,450	Horiz.	5,000	NA	NA	10	923946844516	All
13169R	500	235	220.6	165.0	R7s	NA	2,400	Horiz.	5,000	NA	NA	6	923946844524	All
14120R	500	480	726.0	638.0	R7s	11.0	2,550	Horiz.	5,000	NA	NA	10	924543851716	All
13169CF/850	500	235	230.5	160.0	ClicFit	19.0	2,400	Horiz.	5,000	NA	NA	10	924565044944	
13790R	650	220	550.4	495.0	R7s	11.0	2,200	Horiz.	5,000	NA	NA	10	923947342916	
14174R	650	220	189.1	124.0	R7s	11.0	2,900	Any	500	NA	NA	10	924573344110	All
13842Z	700	240	216.0	150.0	SK15	11.0	2,600	Horiz.	5,000	140/140 insulated	splice	10	924527045516	
13195X	1,000	235	370.0	272.0	X-CLIP	11.0	2,500	Horiz.	5,000	NA	NA	10	923851043916	All
13713X	1,000	235	370.0	272.0	X-CLIP	11.0	2,450	Any	5,000	NA	NA	10	923851543916	All
1000T3/CL	1,000	240	306.0	254.0	U-CLIP	11.0	2,500	Horiz.	5,000	146/146	splice	10	924517945516	All
13402Z	1,000	235	355.0	272.0	SK15	11.0	2,500	Any	5,000	200/200 insulated	fork	10	924533544916	
13195U	1,000	235	346.0	270.0	U-CLIP	11.0	2,500	Horiz.	5,000	202/202	splice	10	924585843916	All
14209X	1,000	120	363.0	280.0	X-CLIP	11.0	2,500	Any	5,000	NA	NA	10	924588936316	All
13941Z	1,500	235	352.0	273.0	SK15	11.0	2,950	Horiz.	1,000	1200/1200	splice	10	924526844916	All